

Machine Tube Luminaire



RL70CE- 136

connected load
fitted with

work equipment
mains lead
luminaire body
material
weight (net)
fastening
light distribution
system of protection
class of protection
total length
light output
outside diameter

article no.

24 V; DC

1 x compact fluorescent lamp TC-L 36 W
neutral white 4000 K
electronic ballast
connecting terminal

acrylic (PMMA); clear
approx. 1,7 kg
lamp bracket (accessory)

direct

IP 67

I

747 mm



364 mm

70 mm

C with screwed cable gland

111450000

E_{min}: 220 lx
E_m: 337 lx
E_{max}: 437 lx

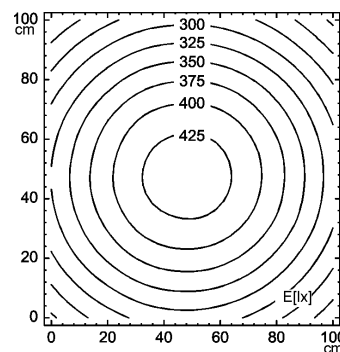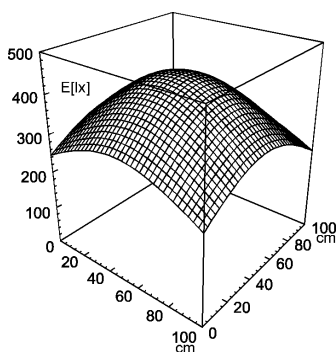

measuring conditions: d=100cm

