

LED machine luminaire



SPOT LED 003 - MCXFL 3 S

fitted with
work equipment
connected load
power consumption
system of protection
class of protection

technology
usage
luminaire body
material
surface
colour luminaire body
lamp cover
balance of articulation joints
weight (net)
mains lead
fastening

special features

article no.


3 x Power-LED
electronic plug in transformer
100-240V, 50/60Hz
approx. 10 W
IP 40 (65)
III

switchable
with switch


aluminium
anodised
black
glass screen
friction
approx. 0.7 kg
approx. 3.0 m, with free stranded wires
screw-down flange~magnetic base (accessory)~table
clamp (accessory)~wall bracket (accessory)

Spot with a 10° angle of radiation

112459007

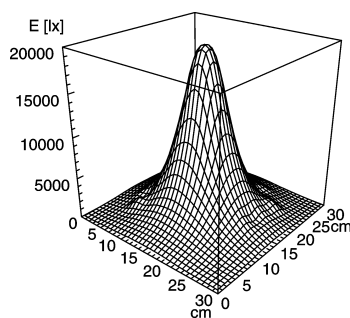

E_{min}: 164 lx
E_m: 3056 lx
E_{max}: 19959 lx

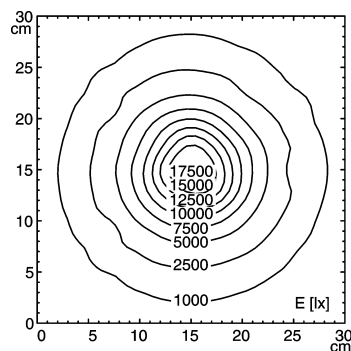

measuring conditions: d=50cm

