

LED machine luminaire



SPOT LED 003 - MCTFL 3 S

fitted with
work equipment
connected load
power consumption
system of protection
class of protection

technology
usage
luminaire body
material
surface
colour luminaire body
lamp cover
tubular sections
material
colour of tubular sections
balance of articulation joints
weight (net)
mains lead
fastening

special features

article no.

3 x Power-LED

without
24 V, AC/DC
approx. 10 W
IP 65
III

switchable
switch

aluminium
anodised
black
glass screen

flexible metal tube

black
friction


approx. 1.3 kg

approx. 3.0 m, with free stranded wires


screw-down flange~magnetic base (accessory)~table
clamp (accessory)~wall bracket (accessory)

Spot with a 10° angle of radiation

112462001-00091851

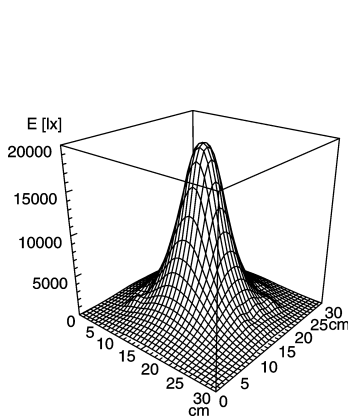

E_{min}: 164 lx
E_m: 3056 lx
E_{max}: 19959 lx

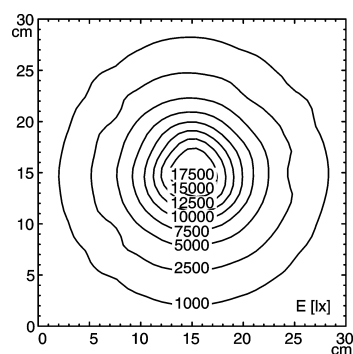

measuring conditions: d=50cm

