

LED machine luminaire



SPOT LED 003 - MCTFL 3 S

fitted with
work equipment
connected load
power consumption
system of protection
class of protection

technology
usage
luminaire body
material
surface
colour luminaire body
lamp cover
tubular sections
material
colour of tubular sections
balance of articulation joints
weight (net)
mains lead
fastening

special features

article no.

3 x Power-LED
without
24 V, AC/DC
approx. 10 W
IP 65
III

switchable
switch


aluminium
anodised
black
glass screen

flexible metal tube
black
friction


approx. 1.3 kg
approx. 3.0 m, with free stranded wires
screw-down flange~magnetic base (accessory)~table
clamp (accessory)~wall bracket (accessory)

Flood with 40° angle of radiation

112462003-00091960

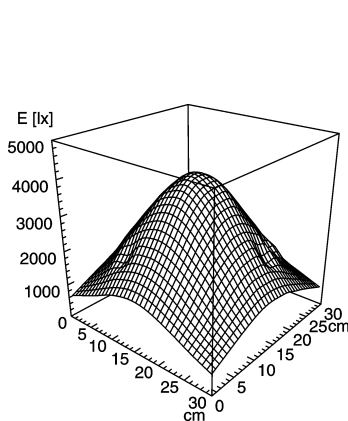

E_{min}: 616 lx
E_m: 2109 lx
E_{max}: 4038 lx

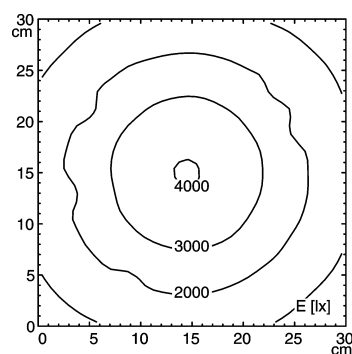

measuring conditions: d=50cm

