

## LED machine luminaire



### SPOT LED 003 - MCBFL 3 S

fitted with  
work equipment  
connected load  
power consumption  
system of protection  
class of protection

technology  
usage  
luminaire body  
material  
surface  
colour luminaire body  
lamp cover

tubular sections  
material  
surface  
colour of tubular sections  
balance of articulation joints  
weight (net)  
mains lead  
fastening

special features

article no.

3 x Power-LED  
without  
24 V, AC/DC  
approx. 10 W  
IP 65  
III


switchable  
switch

aluminium  
anodised  
black  
glass screen


steel tube  
painted  
Jet black  
friction  
approx. 1.3 kg  
approx. 3.0 m, with free stranded wires  
screw-down flange~magnetic base (accessory)~table  
clamp (accessory)~wall bracket (accessory)

Flood with 40° angle of radiation

112463003-00091935

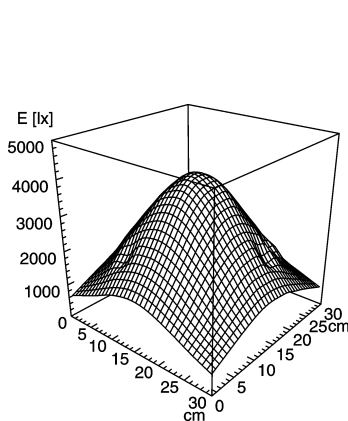

E<sub>min</sub>: 616 lx  
E<sub>m</sub>: 2109 lx  
E<sub>max</sub>: 4038 lx

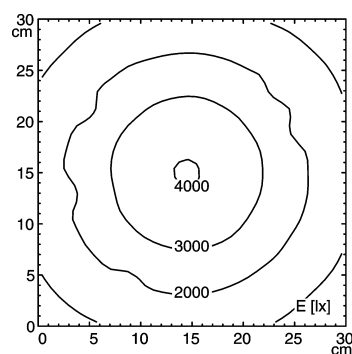

measuring conditions: d=50cm

