

LED machine luminaire



SPOT LED 003 - MCBFL 3 N

fitted with
work equipment
connected load
power consumption
system of protection
class of protection

technology
usage
luminaire body
material
surface
colour luminaire body
lamp cover

tubular sections
material
surface
colour of tubular sections
balance of articulation joints
weight (net)
mains lead
fastening

special features

article no.

3 x Power-LED
electronic plug-in transformer
100-240 V, 50/60 Hz
approx. 10 W
IP 40 (65)
II

switchable
switch


aluminium
anodised
black
glass screen

steel tube
painted
Jet black
friction


approx. 1.6 kg
approx. 3.0 m, European/American plug (N1-15P)
screw-down flange~magnetic base (accessory)~table
clamp (accessory)~wall bracket (accessory)

Flood with 40° angle of radiation

112463009-00091954



E_{min}: 616 lx
E_m: 2109 lx
E_{max}: 4038 lx

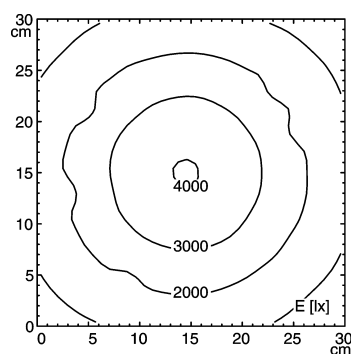

measuring conditions: d=50cm

