

light strip




SLIM LED - LIQ 6


connected load
 fitted with
 work equipment
 mains lead
 design
 luminaire body
 material
 surface
 fastening
 usage
 class of protection
 colour luminaire body
 special features
 article no.

23-25 V; DC
 1 x LED lamp 4 W
 without
 approx. 3.0 m (9.8 ft); with free stranded wires
 mounted version

 aluminum / plastic
 anodized
 screws
 without switch
 III
 aluminum colored anodized
 direction of beam +/- 45° adjustable
 112544010

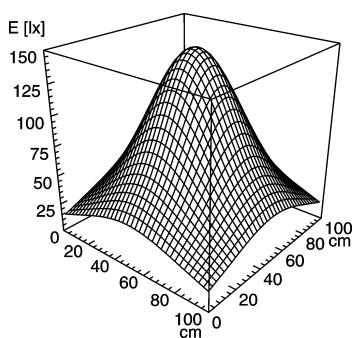

E_{min}: 19 lx
 E_m: 65 lx
 E_{max}: 145 lx

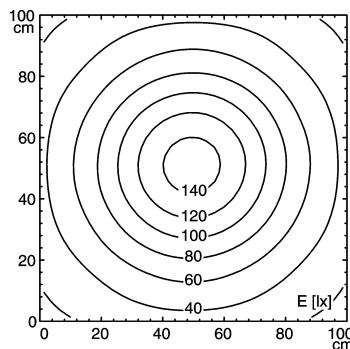

measuring conditions: d=50cm